


500~520W


0~+5W

1000W/m ²	25		≈1.5		
(Pmax/W)	500	505	510	515	520
(Vmpp/V)	33.41	33.61	33.81	34.01	34.21
(Impp/A)	14.97	15.03	15.09	15.15	15.21
(Voc/V)	39.72	39.92	40.12	40.32	40.52
(Isc/A)	15.82	15.87	15.92	15.97	16.02
	22.5%	22.7%	22.9%	23.2%	23.4%

: 1000W/m ²	135W/m ²		25			≈1.5
(Pmax/W)	548	553	558	563	568	
(Vmpp/V)	33.41	33.61	33.81	34.01	34.21	
(Impp/A)	16.41	16.46	16.51	16.56	16.61	
(Voc/V)	39.72	39.92	40.12	40.32	40.52	
(Isc/A)	17.42	17.47	17.53	17.58	17.64	

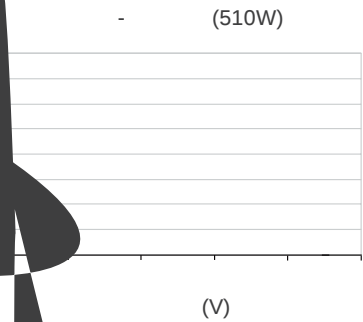

(510W)				
Pmpp/W	Vmpp/V	Impp/A	Voc/V	Isc/A
5%				
15%				
25%				
(Pmpp)			-0.28%/	
(Isc)			+0.043%/	
(Voc)			-0.24%/	
(NMOT)			42±2°C	
(IEC)			1500V _D	
			IP 68	
			30A	
			-40~+85°C	
			80±5%	

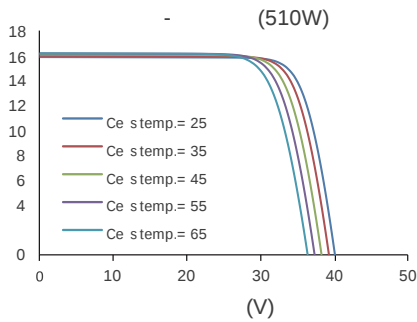

(x x)	1961 x 1134 x 30 mm
N	
	108 (6*18)
	1.6+1.6 mm
	: (+) 1400 mm (-) 1400 mm
(IEC)	4 mm / 12 AWG
	5400 Pa () / 2400 Pa ()
(IEC)	PV-HYC11xyz() / MC4 EVO2A()
	23.5 kg
	36 /
	893 kg
	(17.5m) 1152 /

≈1.5X

3%